

# Next-Generation Frequency and Voltage Control using Inverter-Based Resources

John W. Simpson-Porco

<https://www.control.utoronto.ca/~jwsimpson/>



The Edward S. Rogers Sr. Department  
of Electrical & Computer Engineering  
UNIVERSITY OF TORONTO



UNIVERSITY OF  
**WATERLOO**

**EPRI**


ELECTRIC POWER  
RESEARCH INSTITUTE

*NREL Workshop on Resilient Autonomous Energy Systems*


September 7, 2021

# JWSP Group Research in Control and Power Systems


## Control + Opt of Microgrids

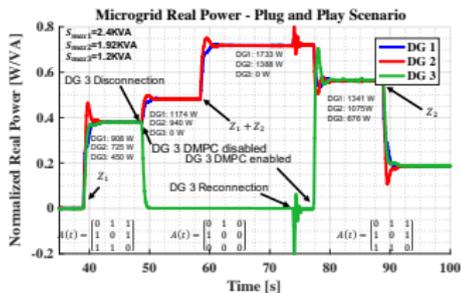


## Feedback-Based Optimization

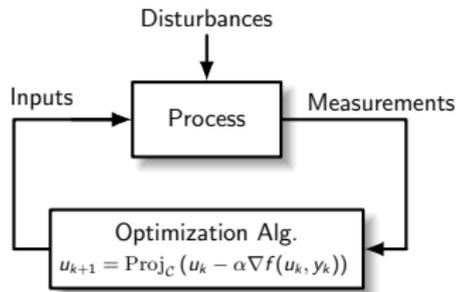

## Robust Methods for Power Flow Analysis

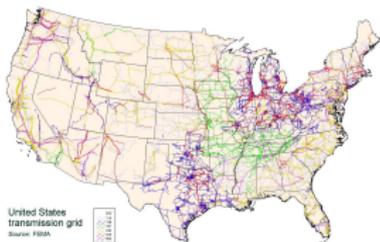

## Automatic Generation Ctrl.

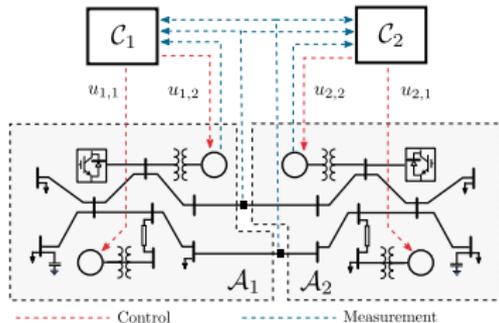

# Motivation

## Selected Trends/Challenges in Grid Modernization:

- 1 reliability concerns from decreased inertia & new RES, DERs
- 2 inadequate legacy monitoring/control architectures (e.g., SCADA)

## Required Advances for Next-Grid Control:

- 1 use of high-bandwidth **closed-loops** (e.g. 10+ samples/sec)
- 2 online coordination of heterogeneous **inverter-based resources** (IBRs)
- 3 **distributed hierarchical controls** for (i) integration of many devices, (ii) local situational awareness, (iii) low-latency localized response

▶ EPRI Whitepaper: *“Next-Generation Grid Monitoring and Control: Toward a Decentralized Hierarchical Control Paradigm”*

# Enabling Fast Control via Inverter-Based Resources

## Objectives and design constraints

**Big Picture:** fully leverage IBR capabilities for freq./volt. control

### ① Design Objectives

- **Fast** and **localized** compensation of disturbances
- Hierarchical/decentralized architecture (min. delay, **scalability**)
- State/control variable **constraint satisfaction**

### ② Design Constraints

- Premium on **simplicity** in design and implementation
- Integrable with **legacy controls**
- Uses **realistically available** model info.

# Enabling Fast Control via Inverter-Based Resources

## Objectives and design constraints

**Big Picture:** fully leverage IBR capabilities for freq./volt. control

### 1 Design Objectives

- **Fast** and **localized** compensation of disturbances
- Hierarchical/decentralized architecture (min. delay, **scalability**)
- State/control variable **constraint satisfaction**

### 2 Design Constraints

- Premium on **simplicity** in design and implementation
- Integrable with **legacy controls**
- Uses **realistically available** model info.

# Enabling Fast Control via Inverter-Based Resources

## Objectives and design constraints

**Big Picture:** fully leverage IBR capabilities for freq./volt. control

### ① Design Objectives

- **Fast** and **localized** compensation of disturbances
- Hierarchical/decentralized architecture (min. delay, **scalability**)
- State/control variable **constraint satisfaction**


### ② Design Constraints

- Premium on **simplicity** in design and implementation
- Integrable with **legacy controls**
- Uses **realistically available** model info.

# Outline of Talk

- ① Frequency controller design
- ② Voltage controller design
- ③ Joint frequency/voltage design


# Review: Frequency Control in the Bulk Grid

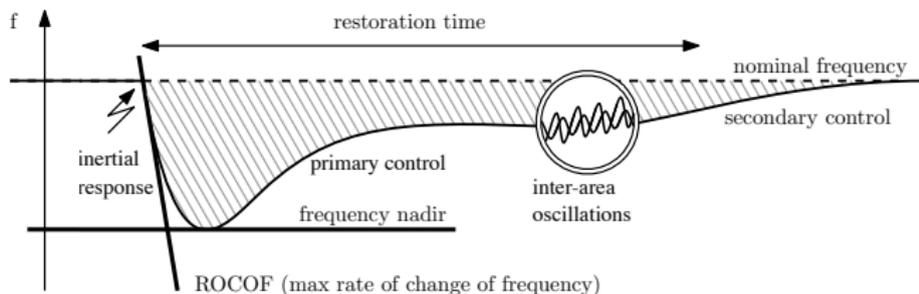

## Fundamentals of frequency control:

- 1 **Inertial** response: fast response of rotating machines  
*Time scale: immediate*
- 2 **Primary** control: turbine-governor control for *stabilization*  
*Time scale: seconds. Spatial scale: local control, global response*
- 3 **Automatic Generation Control (AGC)**: multi-area control which eliminates *generation-load mismatch* within each area  
*Time scale: minutes. Spatial scale: area control, area response.*


# Review: Frequency Control in the Bulk Grid

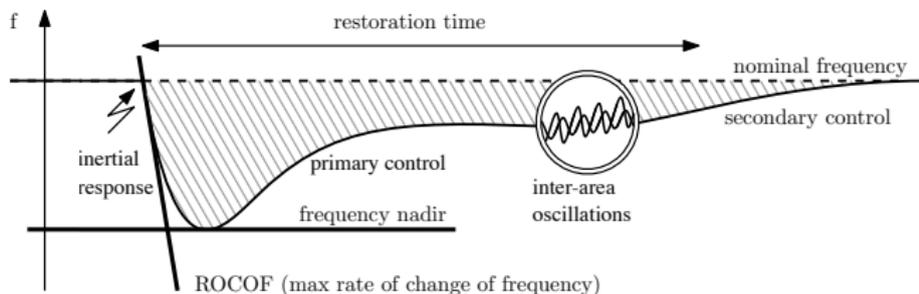

## Fundamentals of frequency control:

- 1 **Inertial** response: fast response of rotating machines  
*Time scale:* immediate
- 2 **Primary** control: turbine-governor control for *stabilization*  
*Time scale:* seconds. *Spatial scale:* local control, global response
- 3 **Automatic Generation Control (AGC)**: multi-area control which eliminates *generation-load mismatch* within each area  
*Time scale:* minutes. *Spatial scale:* area control, area response.


# Review: Frequency Control in the Bulk Grid

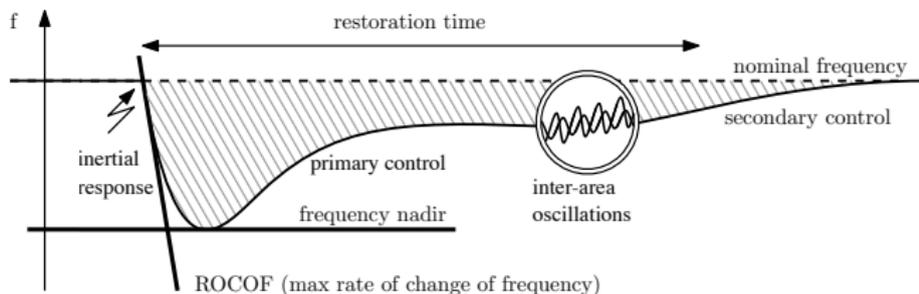

## Fundamentals of frequency control:

- 1 **Inertial** response: fast response of rotating machines  
*Time scale:* immediate
- 2 **Primary** control: turbine-governor control for *stabilization*  
*Time scale:* seconds. *Spatial scale:* local control, global response
- 3 **Automatic Generation Control (AGC)**: multi-area control which eliminates *generation-load mismatch* within each area  
*Time scale:* minutes. *Spatial scale:* area control, area response.


# Review: Frequency Control in the Bulk Grid

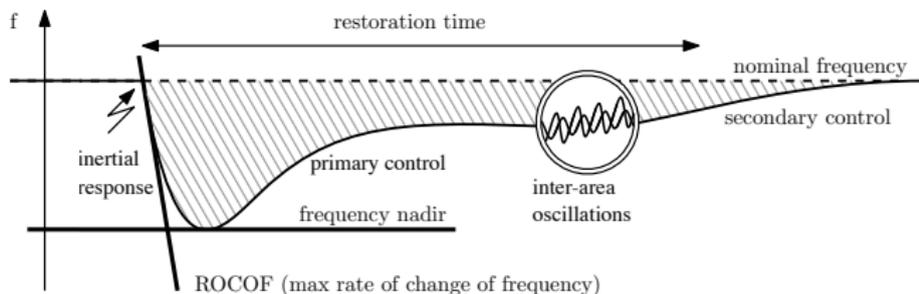

Fundamentals of frequency control:

- 1 **Inertial** response: fast response of rotating machines  
*Time scale:* immediate
- 2 **Primary** control: turbine-governor control for *stabilization*  
*Time scale:* seconds. *Spatial scale:* local control, global response
- 3 **Automatic Generation Control (AGC)**: multi-area control which eliminates *generation-load mismatch* within each area  
*Time scale:* minutes. *Spatial scale:* area control, area response.

# Overview of Proposed Frequency Controller

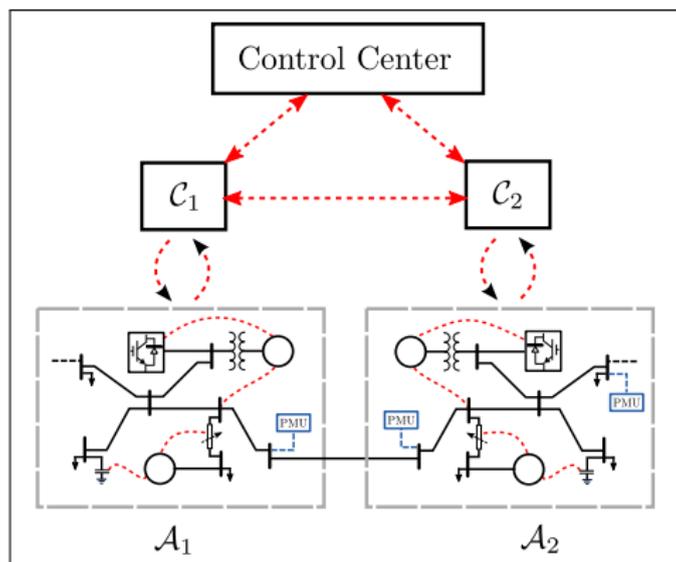


Bulk grid divided into small **local control areas**  $\mathcal{A}_1, \dots, \mathcal{A}_N$  (e.g., a few substations each)

Measurements and resources locally available within each LCA

- 1 **Stage 1:** LCA-decentralized controllers  $\mathcal{C}_k$  redispatch local IBRs
- 2 **Stage 2:** Centralized coordination for severe contingencies

**Conceptual goal:** very fast and localized secondary-like response

# Overview of Proposed Frequency Controller

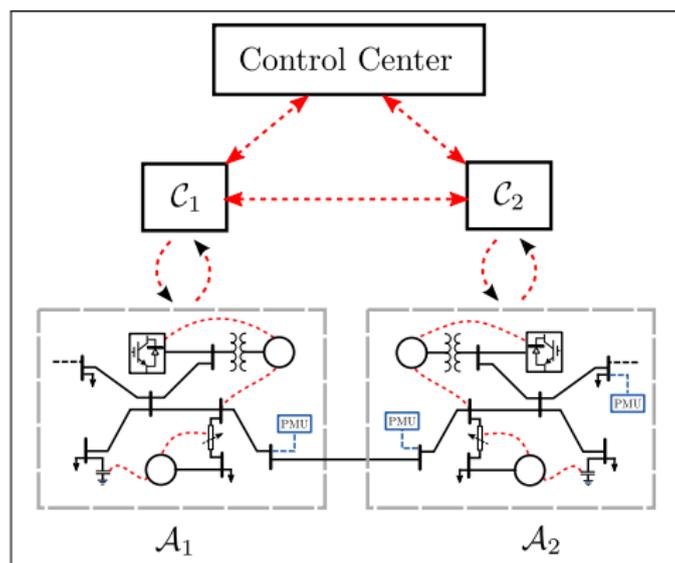


Bulk grid divided into small **local control areas**  $\mathcal{A}_1, \dots, \mathcal{A}_N$  (e.g., a few substations each)

Measurements and resources locally available within each LCA

- 1 **Stage 1:** LCA-decentralized controllers  $\mathcal{C}_k$  redispatch local IBRs
- 2 **Stage 2:** Centralized coordination for severe contingencies

**Conceptual goal:** very fast and localized secondary-like response

# Overview of Proposed Frequency Controller

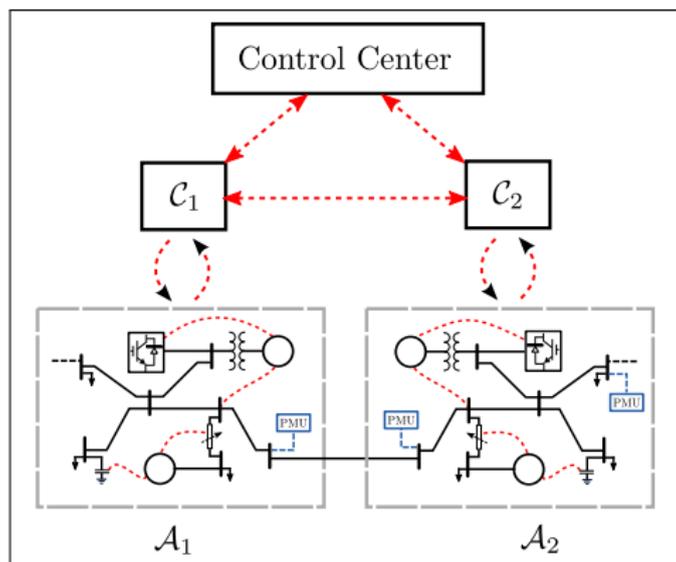


Bulk grid divided into small **local control areas**  $\mathcal{A}_1, \dots, \mathcal{A}_N$  (e.g., a few substations each)

Measurements and resources locally available within each LCA

- 1 **Stage 1:** LCA-decentralized controllers  $\mathcal{C}_k$  redispatch local IBRs
- 2 **Stage 2:** Centralized coordination for severe contingencies

**Conceptual goal:** very fast and localized secondary-like response

# Overview of Proposed Frequency Controller

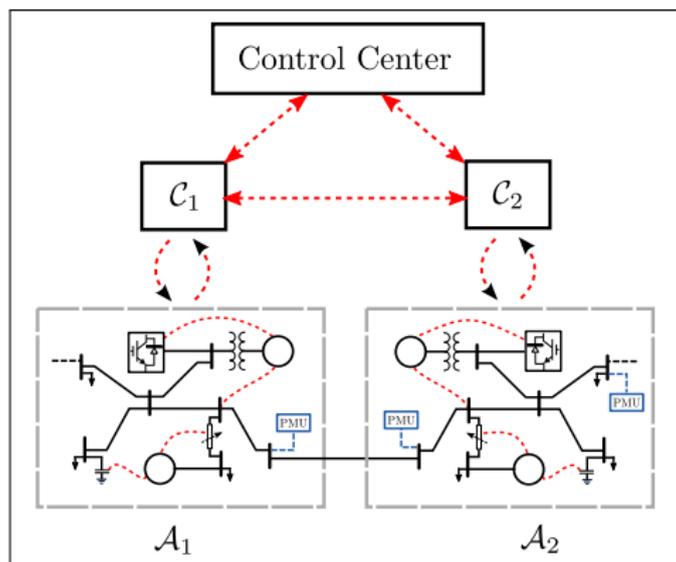

Bulk grid divided into small **local control areas**  $\mathcal{A}_1, \dots, \mathcal{A}_N$  (e.g., a few substations each)


Measurements and resources locally available within each LCA

- 1 **Stage 1:** LCA-decentralized controllers  $\mathcal{C}_k$  redispatch local IBRs
- 2 **Stage 2:** Centralized coordination for severe contingencies

**Conceptual goal:** very **fast and localized** secondary-like response

# Stage 1: Local Control Area (LCA) Frequency Control

Philosophy: quickly estimate and compensate all local imbalance

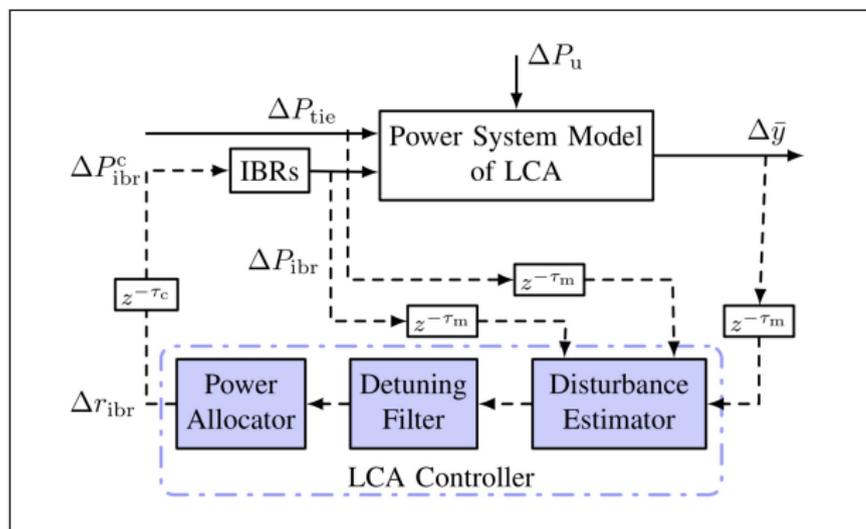


IBRs: can have local  $f/P$  droop curve, but must **accept a provided set-point**

- 1 **Disturbance Estimator**: real-time estimate of gen.-load mismatch
- 2 **Detuning (if needed)**: lower bandwidth to ensure robust stability
- 3 **Power Allocator**: compute (constrained) power set-points for IBRs

# Stage 1: Local Control Area (LCA) Frequency Control

Philosophy: quickly estimate and compensate all local imbalance

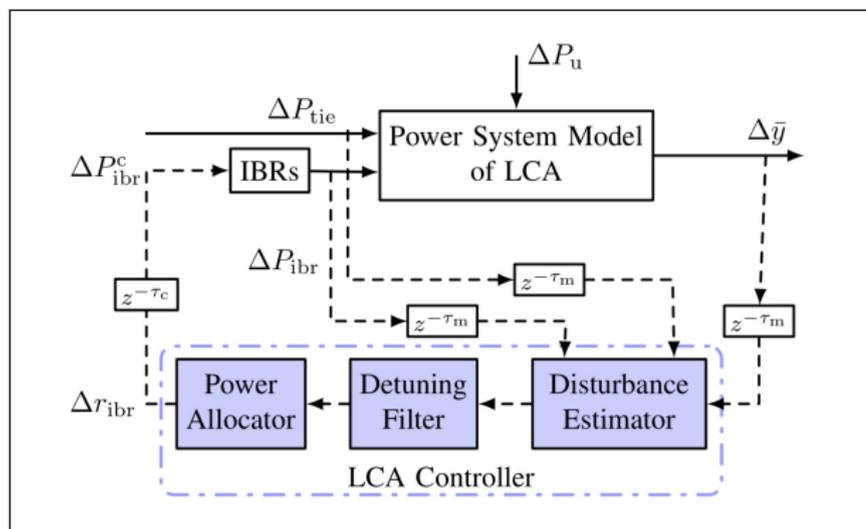


IBRs: can have local  $f/P$  droop curve, but must **accept a provided set-point**

- 1 **Disturbance Estimator**: real-time estimate of gen.-load mismatch
- 2 **Detuning (if needed)**: lower bandwidth to ensure robust stability
- 3 **Power Allocator**: compute (constrained) power set-points for IBRs

# Stage 1: Local Control Area (LCA) Frequency Control

Philosophy: quickly estimate and compensate all local imbalance

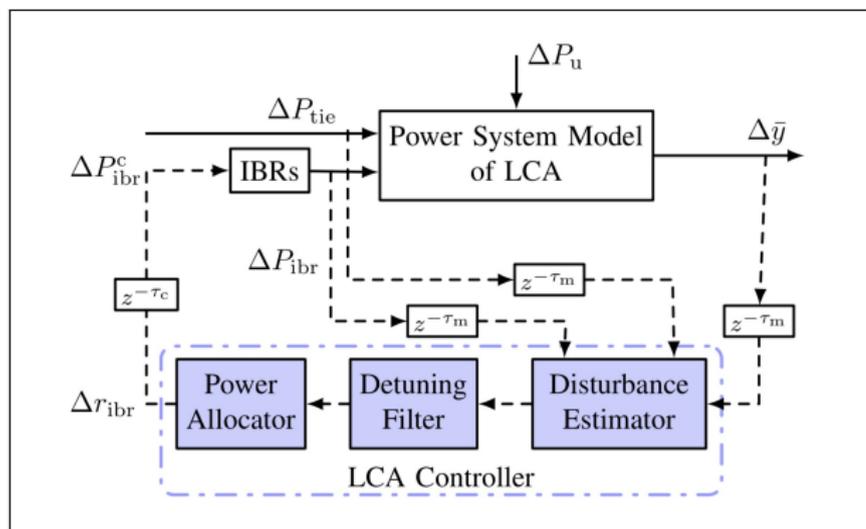


IBRs: can have local  $f/P$  droop curve, but must **accept a provided set-point**

- 1 **Disturbance Estimator**: real-time estimate of gen.-load mismatch
- 2 **Detuning (if needed)**: lower bandwidth to ensure robust stability
- 3 **Power Allocator**: compute (constrained) power set-points for IBRs

# Stage 1: Local Control Area (LCA) Frequency Control

Philosophy: quickly estimate and compensate all local imbalance

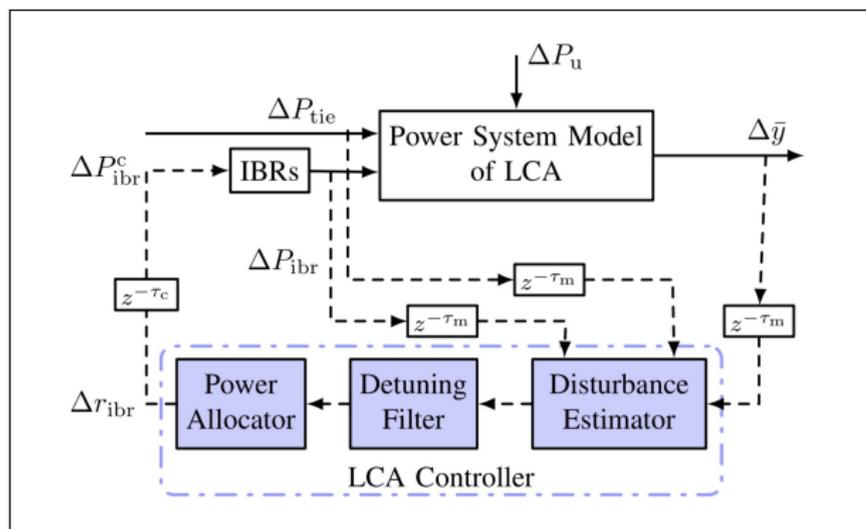

IBRs: can have local  $f/P$  droop curve, but must **accept a provided set-point**

- 1 **Disturbance Estimator**: real-time estimate of gen.-load mismatch
- 2 **Detuning (if needed)**: lower bandwidth to ensure robust stability
- 3 **Power Allocator**: compute (constrained) power set-points for IBRs

# Stage 1: Design of the Disturbance Estimator

An application of classical internal model control (IMC) ...

- 1 A crude/aggregate **LCA model**, e.g.,

$$\begin{aligned}2H\Delta\dot{\omega} &= -(D + \frac{1}{R_I})\Delta\omega + \Delta P_m - \Delta P_u - \Delta P_{\text{inter}} + \Delta P_{\text{ibr}}^c \\ T_R\Delta\dot{P}_m &= -\Delta P_m - R_g^{-1}(\Delta\omega + T_R F_H \Delta\dot{\omega}),\end{aligned}$$

where  $\Delta x = (\Delta\omega, \Delta P_m)$  and  $\Delta P_u =$  unknown gen/load mismatch

- 2 **Assume:**  $\Delta\omega$  measured,  $\Delta P_{\text{inter}}$  measured (subj. to. delays)
- 3 Discretize LCA model & augment with **disturbance/delay models**

$$\Delta P_u(k+1) = \Delta P_u(k), \quad \Delta\omega_m(k) = \Delta\omega(k - \tau_d), \dots$$

- 4 Design **observer** (e.g., Kalman) to estimate  $\Delta\hat{x}(k)$  and  $\Delta\hat{P}_u(k)$

# Stage 1: Design of the Disturbance Estimator

An application of classical internal model control (IMC) ...

- 1 A crude/**aggregate LCA model**, e.g.,

$$2H\Delta\dot{\omega} = -(D + \frac{1}{R_I})\Delta\omega + \Delta P_m - \Delta P_u - \Delta P_{\text{inter}} + \Delta P_{\text{ibr}}^c$$
$$T_R\Delta\dot{P}_m = -\Delta P_m - R_g^{-1}(\Delta\omega + T_R F_H \Delta\dot{\omega}),$$

where  $\Delta x = (\Delta\omega, \Delta P_m)$  and  $\Delta P_u =$  unknown gen/load mismatch

- 2 **Assume:**  $\Delta\omega$  measured,  $\Delta P_{\text{inter}}$  measured (subj. to. delays)
- 3 Discretize LCA model & augment with **disturbance/delay models**

$$\Delta P_u(k+1) = \Delta P_u(k), \quad \Delta\omega_m(k) = \Delta\omega(k - \tau_d), \dots$$

- 4 Design **observer** (e.g., Kalman) to estimate  $\Delta\hat{x}(k)$  and  $\Delta\hat{P}_u(k)$

# Stage 1: Design of the Disturbance Estimator

An application of classical internal model control (IMC) ...

- 1 A crude/**aggregate LCA model**, e.g.,

$$2H\Delta\dot{\omega} = -(D + \frac{1}{R_I})\Delta\omega + \Delta P_m - \Delta P_u - \Delta P_{\text{inter}} + \Delta P_{\text{ibr}}^c$$
$$T_R\Delta\dot{P}_m = -\Delta P_m - R_g^{-1}(\Delta\omega + T_R F_H \Delta\dot{\omega}),$$

where  $\Delta x = (\Delta\omega, \Delta P_m)$  and  $\Delta P_u =$  unknown gen/load mismatch

- 2 **Assume:**  $\Delta\omega$  measured,  $\Delta P_{\text{inter}}$  measured (subj. to. delays)
- 3 Discretize LCA model & augment with **disturbance/delay models**

$$\Delta P_u(k+1) = \Delta P_u(k), \quad \Delta\omega_m(k) = \Delta\omega(k - \tau_d), \dots$$

- 4 Design **observer** (e.g., Kalman) to estimate  $\Delta\hat{x}(k)$  and  $\Delta\hat{P}_u(k)$

# Stage 1: Design of the Disturbance Estimator

An application of classical internal model control (IMC) ...

- 1 A crude/**aggregate LCA model**, e.g.,

$$2H\Delta\dot{\omega} = -(D + \frac{1}{R_I})\Delta\omega + \Delta P_m - \Delta P_u - \Delta P_{\text{inter}} + \Delta P_{\text{ibr}}^c$$
$$T_R\Delta\dot{P}_m = -\Delta P_m - R_g^{-1}(\Delta\omega + T_R F_H \Delta\dot{\omega}),$$

where  $\Delta x = (\Delta\omega, \Delta P_m)$  and  $\Delta P_u =$  unknown gen/load mismatch

- 2 **Assume:**  $\Delta\omega$  measured,  $\Delta P_{\text{inter}}$  measured (subj. to. delays)
- 3 Discretize LCA model & augment with **disturbance/delay models**

$$\Delta P_u(k+1) = \Delta P_u(k), \quad \Delta\omega_m(k) = \Delta\omega(k - \tau_d), \dots$$

- 4 Design **observer** (e.g., Kalman) to estimate  $\Delta\hat{x}(k)$  and  $\Delta\hat{P}_u(k)$

# Stage 1: Design of the Disturbance Estimator

An application of classical internal model control (IMC) ...

- 1 A crude/**aggregate LCA model**, e.g.,

$$2H\Delta\dot{\omega} = -(D + \frac{1}{R_I})\Delta\omega + \Delta P_m - \Delta P_u - \Delta P_{\text{inter}} + \Delta P_{\text{ibr}}^c$$
$$T_R\Delta\dot{P}_m = -\Delta P_m - R_g^{-1}(\Delta\omega + T_R F_H \Delta\dot{\omega}),$$

where  $\Delta x = (\Delta\omega, \Delta P_m)$  and  $\Delta P_u =$  unknown gen/load mismatch


- 2 **Assume:**  $\Delta\omega$  measured,  $\Delta P_{\text{inter}}$  measured (subj. to. delays)
- 3 Discretize LCA model & augment with **disturbance/delay models**

$$\Delta P_u(k+1) = \Delta P_u(k), \quad \Delta\omega_m(k) = \Delta\omega(k - \tau_d), \dots$$

- 4 Design **observer** (e.g., Kalman) to estimate  $\Delta\hat{x}(k)$  **and**  $\Delta\hat{P}_u(k)$

# Stage 1: Detuning and Power Allocator

An application of classical internal model control (IMC) ...

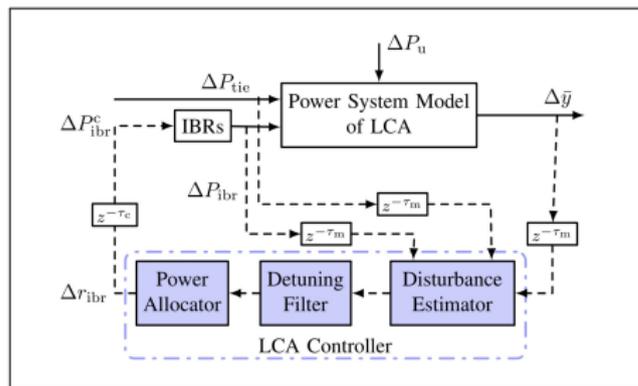

**Detuning (optional):**

low-pass filter

$$F(z) = \frac{1 - e^{-T/\tau}}{z - e^{-T/\tau}}$$

for lowering controller  
bandwidth


**Power Allocator:** Allocate disturbance estimate  $\Delta \hat{P}_u$  to compute IBR set-points  $P_{ik}$  within the  $i$ th LCA:

$$\underset{\varphi_i, P_{ik} \in [P_{ik}, \bar{P}_{ik}]}{\text{minimize}} \quad f_i(\{P_{ik}\}) + \lambda_i |\varphi_i|$$

$$\text{subject to} \quad \sum_{k \in I_i} (P_{ik} - P_{ik}^{\text{dispatch}}) + \varphi_i = \Delta \hat{P}_{u,i}$$

# Stage 1: Detuning and Power Allocator

An application of classical internal model control (IMC) ...

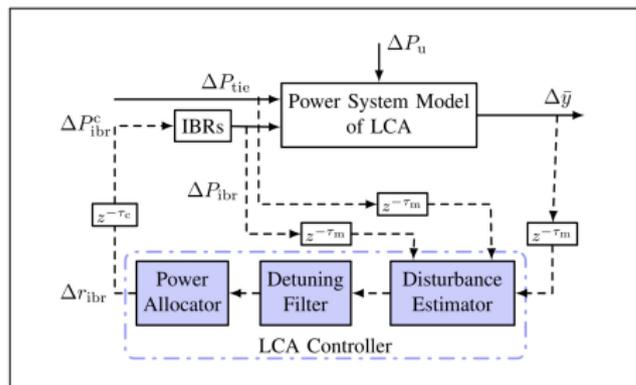

**Detuning (optional):**

low-pass filter

$$F(z) = \frac{1 - e^{-T/\tau}}{z - e^{-T/\tau}}$$


for lowering controller bandwidth

**Power Allocator:** Allocate disturbance estimate  $\Delta \hat{P}_u$  to compute IBR set-points  $P_{ik}$  within the  $i$ th LCA:

$$\underset{\varphi_i, P_{ik} \in [P_{ik}, \bar{P}_{ik}]}{\text{minimize}} \quad f_i(\{P_{ik}\}) + \lambda_i |\varphi_i|$$


$$\text{subject to} \quad \sum_{k \in I_i} (P_{ik} - P_{ik}^{\text{dispatch}}) + \varphi_i = \Delta \hat{P}_{u,i}$$

# Case Study: Three-LCA System

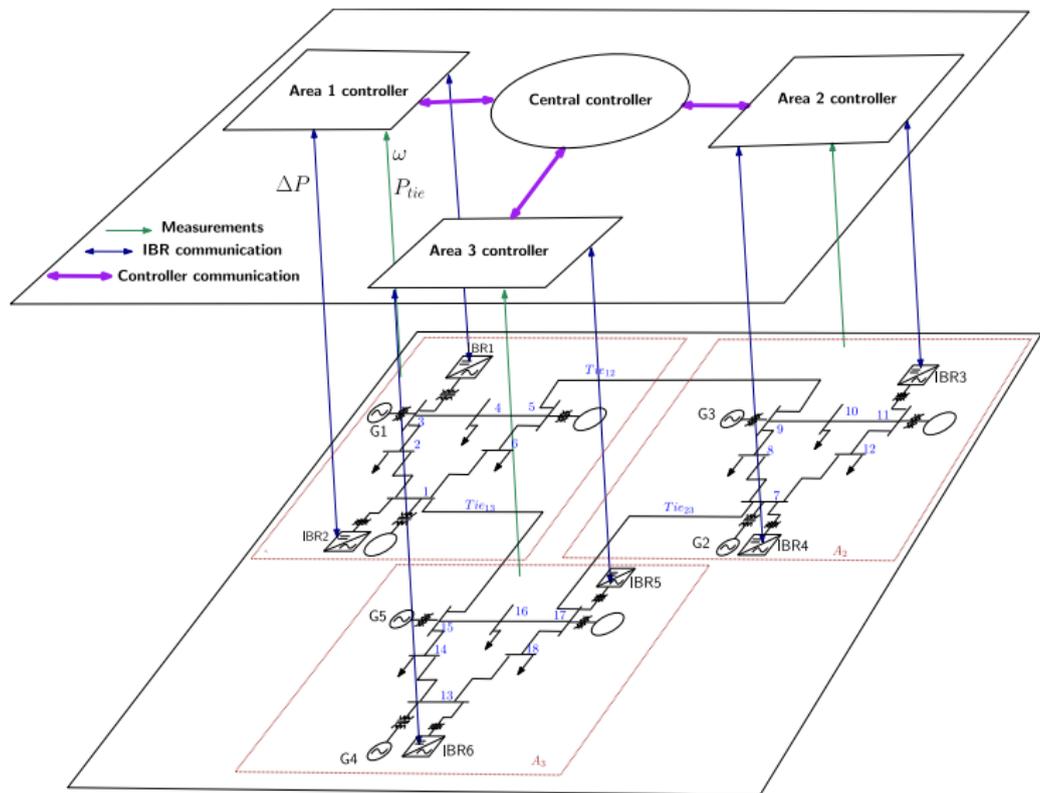


## Simplified Model Response vs. True Nonlinear Model

- LCA model parameters set via simple inertia/droop gain aggregation and using largest turbine-gov time constant (**very crude!**)
- 63 MW load increase in Area 2

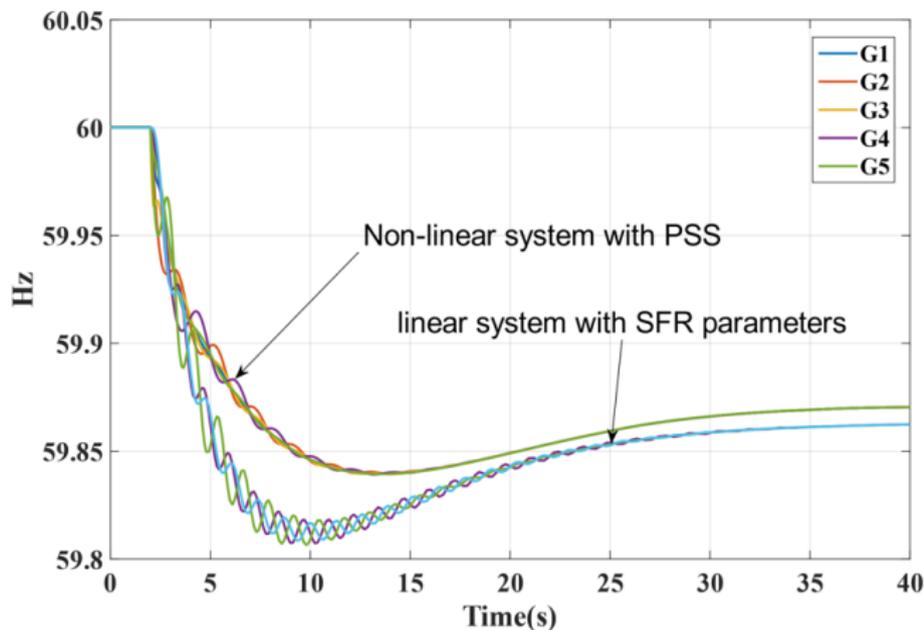

## Scenario: 63 MW Disturbance, Area 2

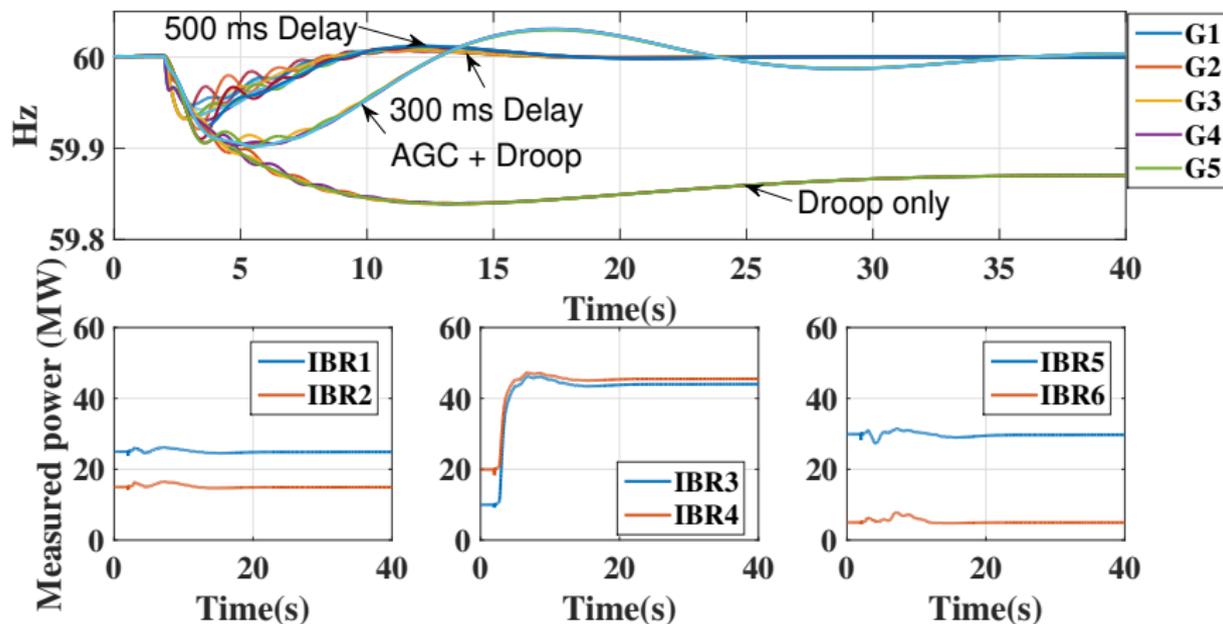

**Localized Response:** IBRs in Area 2 ramp quickly; IBRs in Areas 1/3 don't *need* to react, so they don't.

## Stage 2: Centralized Coordinator Design

What if local IBR capacity is **insufficient** to meet the disturbance?  
Then IBRs in **electrically close** areas should respond.

- mismatch variable  $\varphi_i$  from Stage 1 will be **non-zero**
- total IBR adjustments  $a_i$  computed as

$$\begin{aligned} & \underset{\{a_i\}_{i \in \mathcal{A}}}{\text{minimize}} && \sum_{i \in \mathcal{A}} q_i a_i^2 \\ & \text{s.t.} && 0 = \sum_{i \in \mathcal{A}} (a_i - \varphi_i^*) \\ & && 0 \leq a_i \cdot \text{sign}\left(\sum_{i \in \mathcal{A}} \varphi_i^*\right), \quad i \in \mathcal{A} \\ & && a_i + \sum_{j \in \mathcal{I}_i} P_{ij}^* \in [\text{lower}, \text{upper}], \quad i \in \mathcal{A}. \end{aligned}$$

**Solution method matters!** Centralized vs. privacy-preserving ADMM

## Stage 2: Centralized Coordinator Design

What if local IBR capacity is **insufficient** to meet the disturbance?  
Then IBRs in **electrically close** areas should respond.

- mismatch variable  $\varphi_i$  from Stage 1 will be **non-zero**
- total IBR adjustments  $a_i$  computed as

$$\begin{aligned} & \underset{\{a_i\}_{i \in \mathcal{A}}}{\text{minimize}} && \sum_{i \in \mathcal{A}} q_i a_i^2 \\ & \text{s.t.} && 0 = \sum_{i \in \mathcal{A}} (a_i - \varphi_i^*) \\ & && 0 \leq a_i \cdot \text{sign}\left(\sum_{i \in \mathcal{A}} \varphi_i^*\right), \quad i \in \mathcal{A} \\ & && a_i + \sum_{j \in \mathcal{I}_i} P_{ij}^* \in [\text{lower}, \text{upper}], \quad i \in \mathcal{A}. \end{aligned}$$

**Solution method matters!** Centralized vs. privacy-preserving ADMM

## Stage 2: Centralized Coordinator Design

What if local IBR capacity is **insufficient** to meet the disturbance?  
Then IBRs in **electrically close** areas should respond.

- mismatch variable  $\varphi_i$  from Stage 1 will be **non-zero**
- total IBR adjustments  $a_i$  computed as

$$\begin{aligned} & \underset{\{a_i\}_{i \in \mathcal{A}}}{\text{minimize}} && \sum_{i \in \mathcal{A}} q_i a_i^2 \\ & \text{s.t.} && 0 = \sum_{i \in \mathcal{A}} (a_i - \varphi_i^*) \\ & && 0 \leq a_i \cdot \text{sign}\left(\sum_{i \in \mathcal{A}} \varphi_i^*\right), \quad i \in \mathcal{A} \\ & && a_i + \sum_{j \in \mathcal{I}_i} P_{ij}^* \in [\text{lower}, \text{upper}], \quad i \in \mathcal{A}. \end{aligned}$$

**Solution method matters!** Centralized vs. privacy-preserving ADMM

## Stage 2: Centralized Coordinator Design


What if local IBR capacity is **insufficient** to meet the disturbance?  
Then IBRs in **electrically close** areas should respond.

- mismatch variable  $\varphi_i$  from Stage 1 will be **non-zero**
- total IBR adjustments  $a_i$  computed as

$$\begin{aligned} & \underset{\{a_i\}_{i \in \mathcal{A}}}{\text{minimize}} && \sum_{i \in \mathcal{A}} q_i a_i^2 \\ & \text{s.t.} && 0 = \sum_{i \in \mathcal{A}} (a_i - \varphi_i^*) \\ & && 0 \leq a_i \cdot \text{sign}\left(\sum_{i \in \mathcal{A}} \varphi_i^*\right), \quad i \in \mathcal{A} \\ & && a_i + \sum_{j \in \mathcal{I}_i} P_{ij}^* \in [\text{lower}, \text{upper}], \quad i \in \mathcal{A}. \end{aligned}$$

**Solution method matters!** Centralized vs. privacy-preserving ADMM

## Scenario: 130MW Disturbance, Area 2

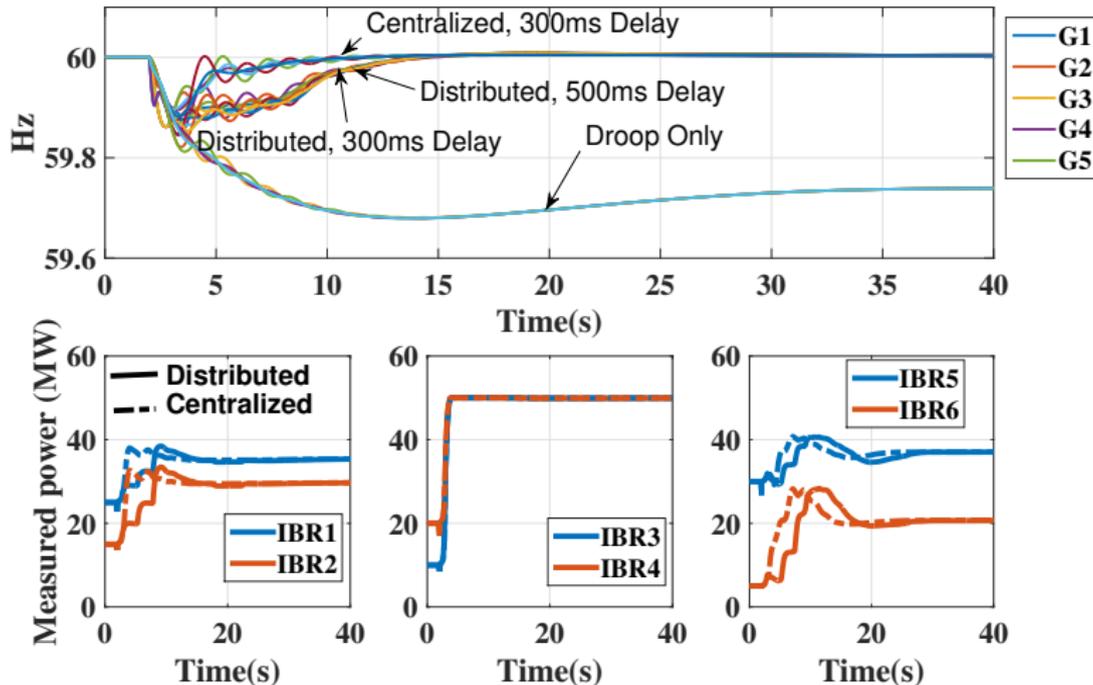

IBRs in Area 2 hit limits; Stage 2 forces Area 1/3 response.

# Conclusions for Frequency Control

## Summary:

- Two-stage design: local area control & global coordination
- Design enables **fast frequency control** via IBRs
- Response is **localized** to the contingency
- Inherent **robustness** against model imperfections

## Ongoing:

- remove even the crude model requirement via **data-driven** control
- extend to incorporate **distribution**-integrated DERs

**Paper:** <https://www.control.utoronto.ca/~jwsimpson/>

- ① IEEE TPWRS: "*Hierarchical Coordinated Fast Frequency Control using Inverter-Based Resources*"

# Conclusions for Frequency Control

## Summary:

- Two-stage design: local area control & global coordination
- Design enables **fast frequency control** via IBRs
- Response is **localized** to the contingency
- Inherent **robustness** against model imperfections

## Ongoing:

- remove even the crude model requirement via **data-driven** control
- extend to incorporate **distribution**-integrated DERs

Paper: <https://www.control.utoronto.ca/~jwsimpson/>

- ① IEEE TPWRS: "*Hierarchical Coordinated Fast Frequency Control using Inverter-Based Resources*"

# Conclusions for Frequency Control

## Summary:

- Two-stage design: local area control & global coordination
- Design enables **fast frequency control** via IBRs
- Response is **localized** to the contingency
- Inherent **robustness** against model imperfections

## Ongoing:

- remove even the crude model requirement via **data-driven** control
- extend to incorporate **distribution**-integrated DERs

**Paper:** <https://www.control.utoronto.ca/~jwsimpson/>



- 1 IEEE TPWRS: *"Hierarchical Coordinated Fast Frequency Control using Inverter-Based Resources"*







# Overview of Proposed Voltage Controller (One-Area)

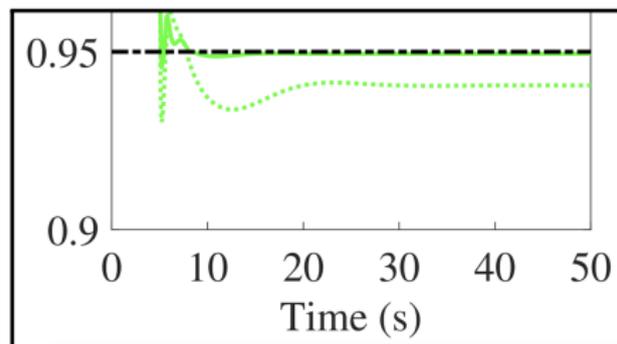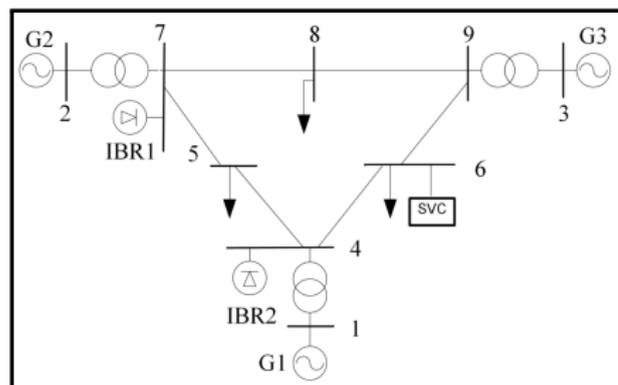

## Control resources:

- SGs:  $v_g^{\text{ref}} \rightarrow q_g$
- SVCs:  $v_s^{\text{ref}} \rightarrow q_s$
- IBRs:  $q_i^{\text{ref}} \rightarrow q_i$
- $u$  = vector of references
- $q$  = vector of power outputs

## Model:

$$\dot{x} = f(x, u, w)$$
$$y = (v, q) = h(x, u, w)$$

$$\text{minimize}_{u \in \{\text{Limits}\}} f(q)$$


subject to voltage limits  
power limits

# Steady-State Optimization Problem (One-Area)

minimize  $Priority(q_g, q_s, q_i) + PenaltyFcn(q_g, q_s, v) := F(u, y)$   
 $v_g^{ref}, v_s^{ref}, q_i^{ref}$

subject to  $y = (q_g, q_s, v) = \pi(v_g^{ref}, v_s^{ref}, q_i^{ref}, w) = \pi(u, w)$

$u = (v_g^{ref}, v_s^{ref}, q_i^{ref}) \in \mathcal{U}$

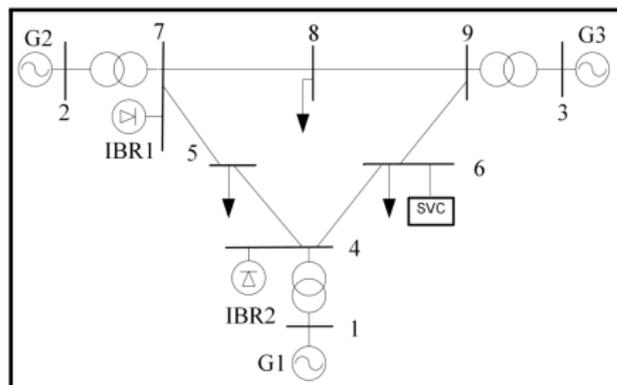



## Feedback Implementation of Voltage Controller

- approximate gradient method steps can be evaluated using **real-time system measurements** leading to a **feedback controller**

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- nonlinear controller implemented on a nonlinear dynamic transmission system; stability analysis is non-trivial

**Theorem:** Assume grid is nominally “stable” and “well-behaved”. If

$$u \mapsto \nabla_u F(u, \pi(u, w)) + \Pi^T \nabla_y F(u, \pi(u, w))$$

is a **strongly monotone** operator, then CLS is stable for all sufficiently small controller gains  $\alpha > 0$ .

## Feedback Implementation of Voltage Controller

- approximate gradient method steps can be evaluated using **real-time system measurements** leading to a **feedback controller**

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- nonlinear controller implemented on a nonlinear dynamic transmission system; stability analysis is non-trivial

**Theorem:** Assume grid is nominally “stable” and “well-behaved”. If

$$u \mapsto \nabla_u F(u, \pi(u, w)) + \Pi^T \nabla_y F(u, \pi(u, w))$$

is a **strongly monotone** operator, then CLS is stable for all sufficiently small controller gains  $\alpha > 0$ .

## Feedback Implementation of Voltage Controller

- approximate gradient method steps can be evaluated using **real-time system measurements** leading to a **feedback controller**

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- nonlinear controller implemented on a nonlinear dynamic transmission system; stability analysis is non-trivial

**Theorem:** Assume grid is nominally “stable” and “well-behaved”. If

$$u \mapsto \nabla_u F(u, \pi(u, w)) + \Pi^T \nabla_y F(u, \pi(u, w))$$

is a **strongly monotone** operator, then CLS is stable for all sufficiently small controller gains  $\alpha > 0$ .

# Add-Ons and Extensions for Voltage Controller

The base controller is flexible and admits various modifications

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- 1 **Multi LCA Systems:** use one-area controller in each LCA
- 2 **Faster/Slower Unit Responses:** replace  $\alpha$  with diagonal matrix  $\alpha = \text{blkdiag}(\alpha_{\text{ibr}}, \alpha_{\text{svc}}, \alpha_{\text{sg}})$  and tune elements as desired
- 3 **Improved Recovery to Pre-Fault Operating Voltages:** integrate term proportional to  $\|\Delta v_{\text{sg}}\|_2^2$  into objective function
- 4 **Increased Transient Response:** integrate term proportional to  $y_k - y_{k-1}$  into controller (“derivative” action)

# Add-Ons and Extensions for Voltage Controller

The base controller is flexible and admits various modifications

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- 1 **Multi LCA Systems:** use one-area controller in each LCA
- 2 **Faster/Slower Unit Responses:** replace  $\alpha$  with diagonal matrix  $\alpha = \text{blkdiag}(\alpha_{\text{ibr}}, \alpha_{\text{svc}}, \alpha_{\text{sg}})$  and tune elements as desired
- 3 **Improved Recovery to Pre-Fault Operating Voltages:** integrate term proportional to  $\|\Delta v_{\text{sg}}\|_2^2$  into objective function
- 4 **Increased Transient Response:** integrate term proportional to  $y_k - y_{k-1}$  into controller (“derivative” action)

# Add-Ons and Extensions for Voltage Controller

The base controller is flexible and admits various modifications

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- 1 **Multi LCA Systems:** use one-area controller in each LCA
- 2 **Faster/Slower Unit Responses:** replace  $\alpha$  with diagonal matrix  $\alpha = \text{blkdiag}(\alpha_{\text{ibr}}, \alpha_{\text{svc}}, \alpha_{\text{sg}})$  and tune elements as desired
- 3 **Improved Recovery to Pre-Fault Operating Voltages:** integrate term proportional to  $\|\Delta v_{\text{sg}}\|_2^2$  into objective function
- 4 **Increased Transient Response:** integrate term proportional to  $y_k - y_{k-1}$  into controller (“derivative” action)

# Add-Ons and Extensions for Voltage Controller

The base controller is flexible and admits various modifications

$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- 1 **Multi LCA Systems:** use one-area controller in each LCA
- 2 **Faster/Slower Unit Responses:** replace  $\alpha$  with diagonal matrix  $\alpha = \text{blkdiag}(\alpha_{\text{ibr}}, \alpha_{\text{svc}}, \alpha_{\text{sg}})$  and tune elements as desired
- 3 **Improved Recovery to Pre-Fault Operating Voltages:** integrate term proportional to  $\|\Delta v_{\text{sg}}\|_2^2$  into objective function
- 4 **Increased Transient Response:** integrate term proportional to  $y_k - y_{k-1}$  into controller (“derivative” action)

# Add-Ons and Extensions for Voltage Controller

The base controller is flexible and admits various modifications


$$u_{k+1} = \text{Proj}_{\mathcal{U}} \left\{ u_k - \alpha \left( \nabla_u F(u_k, y_k) + \Pi^T \nabla_y F(u_k, y_k) \right) \right\}$$

- 1 **Multi LCA Systems:** use one-area controller in each LCA
- 2 **Faster/Slower Unit Responses:** replace  $\alpha$  with diagonal matrix  $\alpha = \text{blkdiag}(\alpha_{\text{ibr}}, \alpha_{\text{svc}}, \alpha_{\text{sg}})$  and tune elements as desired
- 3 **Improved Recovery to Pre-Fault Operating Voltages:** integrate term proportional to  $\|\Delta v_{\text{sg}}\|_2^2$  into objective function
- 4 **Increased Transient Response:** integrate term proportional to  $y_k - y_{k-1}$  into controller (“derivative” action)

# Scenario: 120 MVAR Disturbance (SG Priority)

solid: with proposed controller


dotted: without

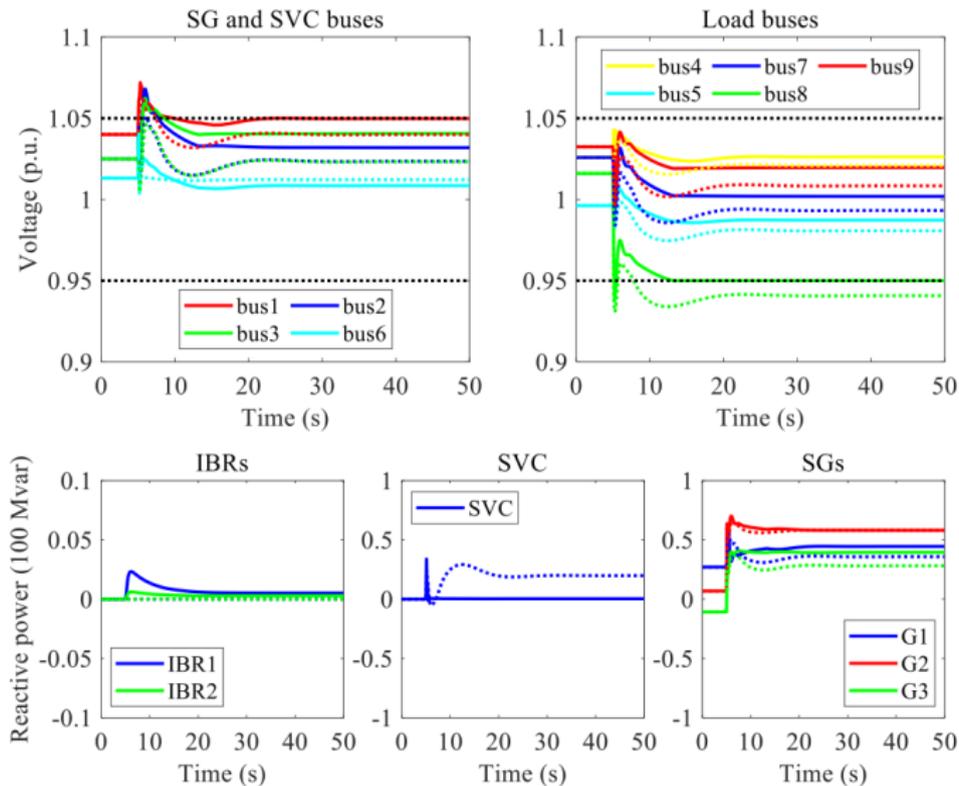

# Scenario: 180 MVAR Disturbance (G2/IBR Priority)

solid: with proposed controller


dotted: **ignore**

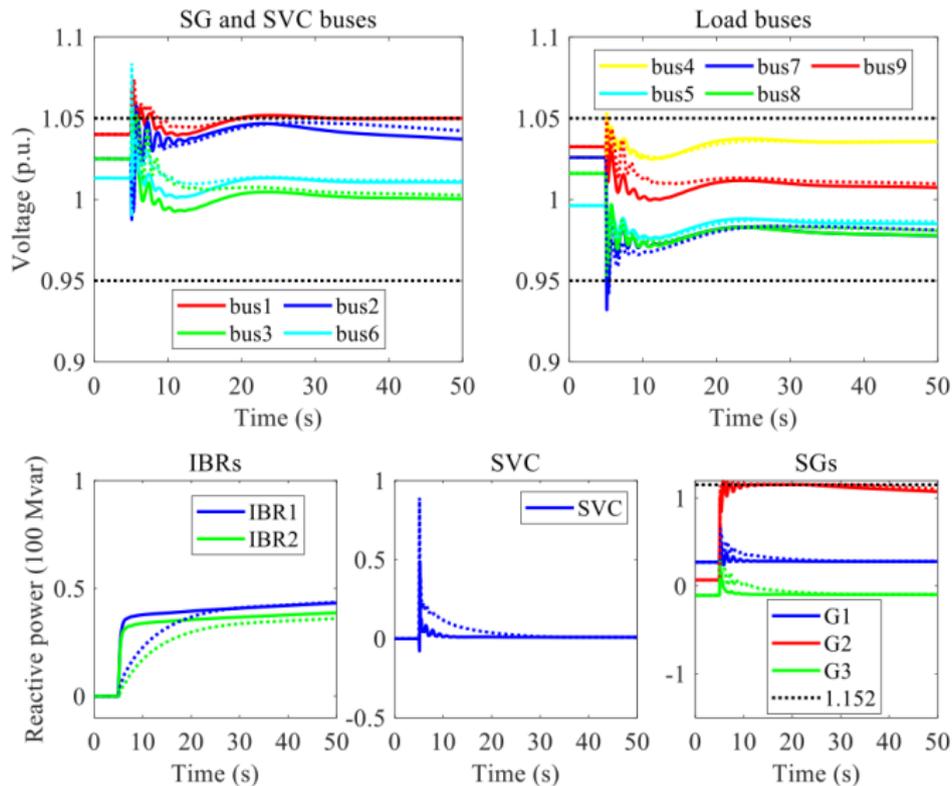

# Scenario: 180 MVAR Disturbance (IBR Priority)

solid: with proposed controller

dotted: **ignore**

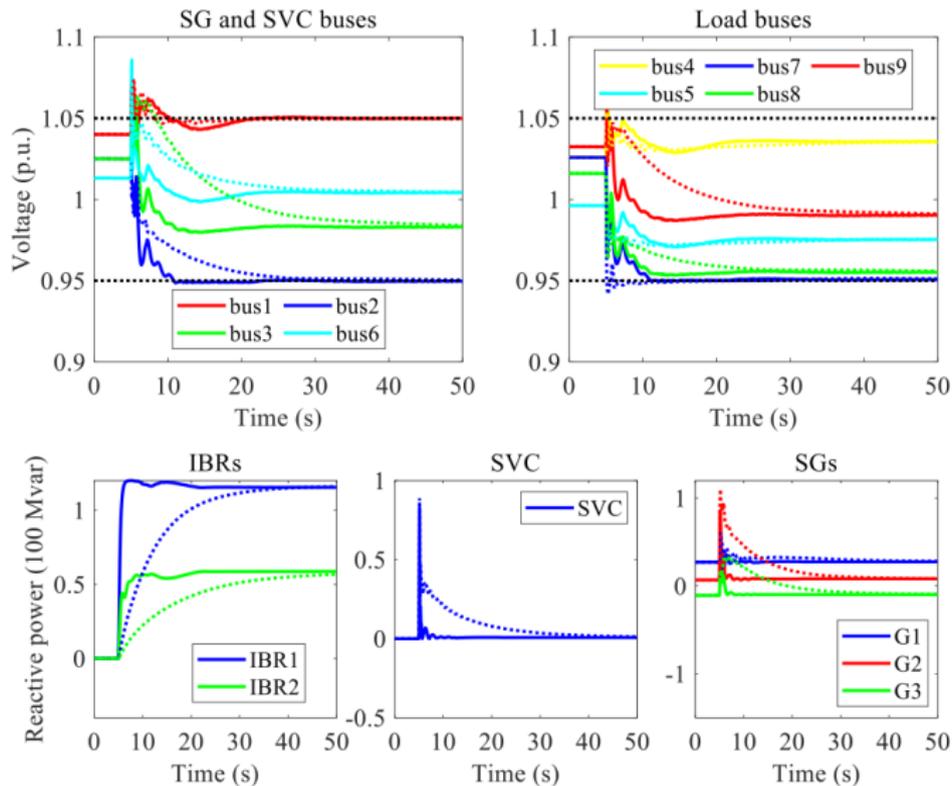

# Conclusions for Voltage Control

## Summary:

- Local area control based on local model/meas.
- Flexible design allows operator to set device priority
- Bus voltage and device output constraint satisfaction
- More scenarios: line trips, 3 $\phi$ -fault, multi-areas, etc. . . .

## Ongoing:

- combine with online least-squares sensitivity estimation (model-free)
- integration with frequency controller

**Paper:** <https://www.control.utoronto.ca/~jwsimpson/>

- 1 IEEE TPWRS: "*Measurement-Based Fast Coordinated Voltage Control for Transmission Grids*"

# Conclusions for Voltage Control

## Summary:

- Local area control based on local model/meas.
- Flexible design allows operator to set device priority
- Bus voltage and device output constraint satisfaction
- More scenarios: line trips,  $3\phi$ -fault, multi-areas, etc. . . .

## Ongoing:

- combine with online least-squares sensitivity estimation (model-free)
- integration with frequency controller

Paper: <https://www.control.utoronto.ca/~jwsimpson/>

- 1 IEEE TPWRS: "*Measurement-Based Fast Coordinated Voltage Control for Transmission Grids*"

# Conclusions for Voltage Control

## Summary:

- Local area control based on local model/meas.
- Flexible design allows operator to set device priority
- Bus voltage and device output constraint satisfaction
- More scenarios: line trips,  $3\phi$ -fault, multi-areas, etc. . . .

## Ongoing:

- combine with online least-squares sensitivity estimation (model-free)
- integration with frequency controller


**Paper:** <https://www.control.utoronto.ca/~jwsimpson/>

- 1 IEEE TPWRS: "*Measurement-Based Fast Coordinated Voltage Control for Transmission Grids*"

# Integration of Freq. and Volt. Controllers

The two controllers can operate simultaneously.

## 1 Allocate IBR capacity priority

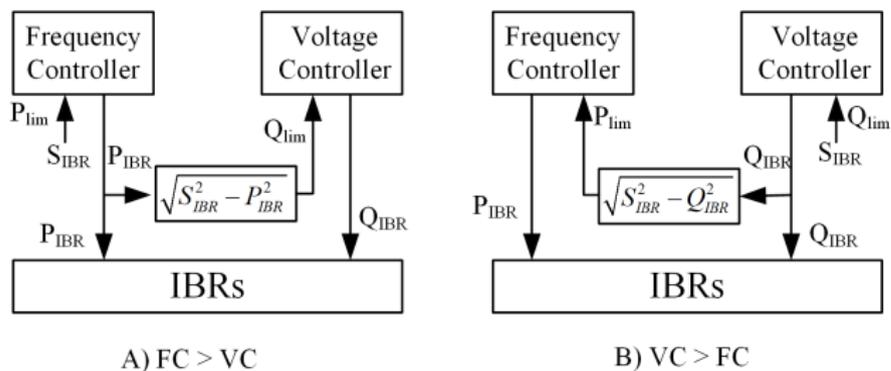





## 2 Dynamic cross-couplings between controllers:

- **voltage-sensitivity** of (e.g., impedance) loads
- **PSS** and VC both operate through SG AVR systems

# Scenario: 150MW/80MVAR Disturbance (FC Priority)

solid: with proposed controller





dotted: without

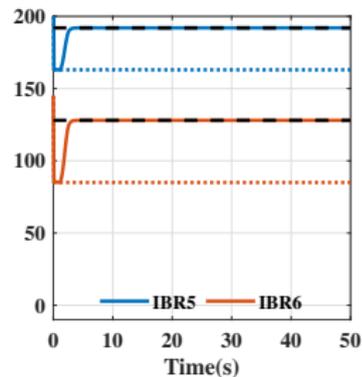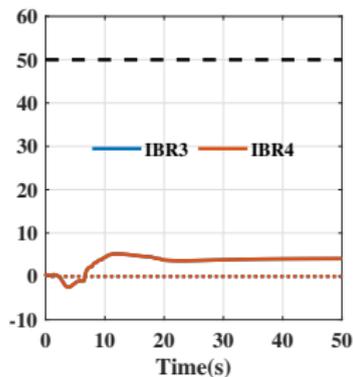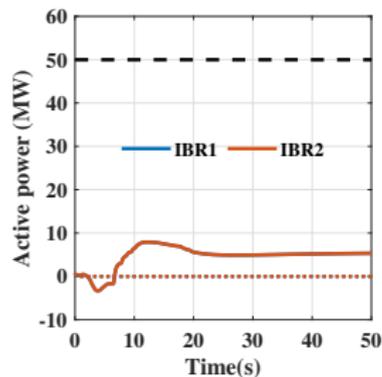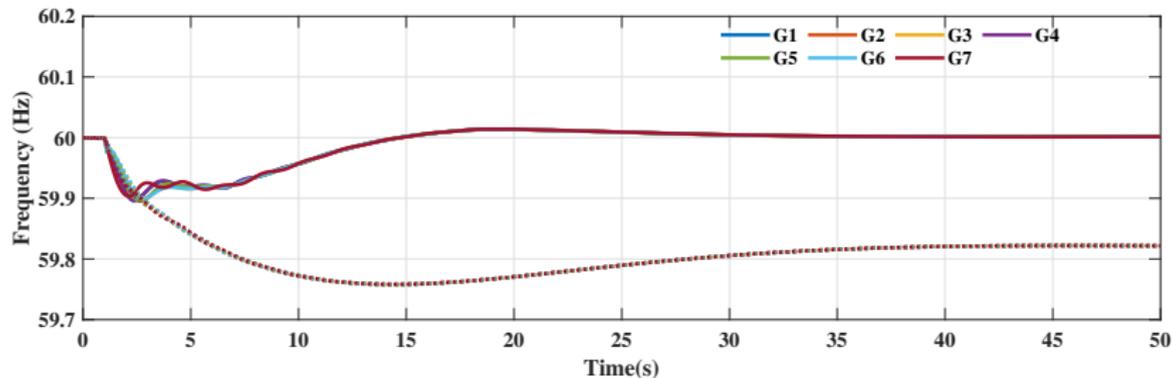

# Scenario: 150MW/80MVAR Disturbance (FC Priority)


solid: with proposed controller

dotted: without

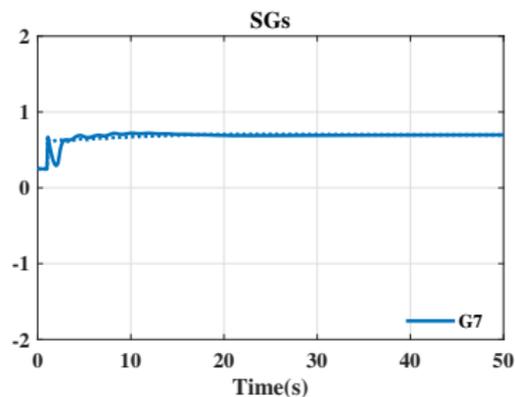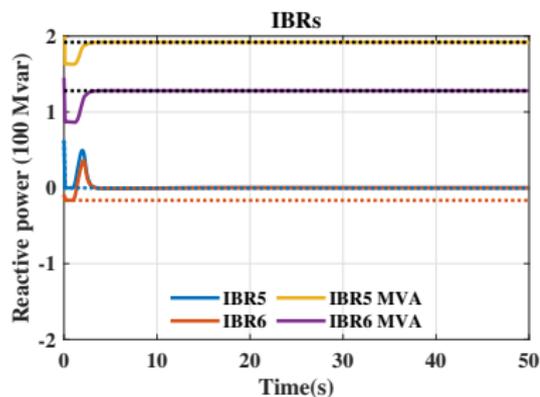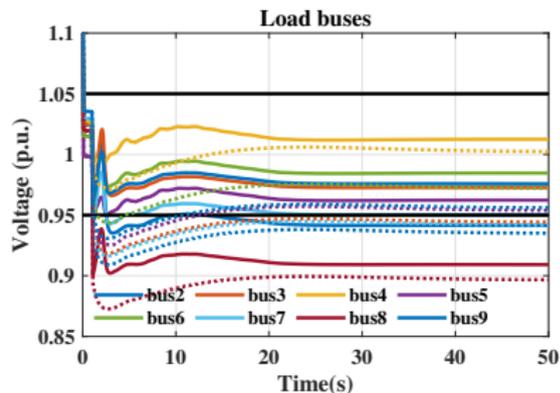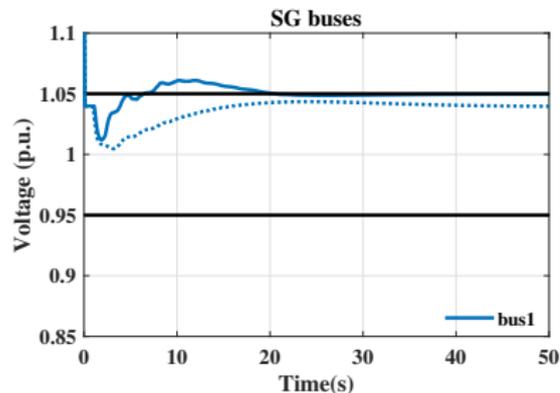


## Collaborators

**UWaterloo:** Etinosa Ekomwenrenren (PhD), Zhiyuan Tang (PDF), JWSP

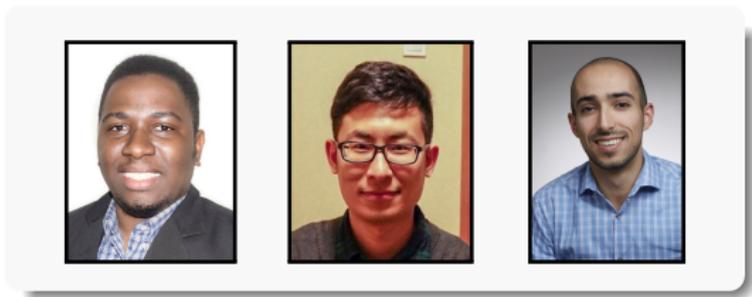

**EPRI:** Evangelos Farantatos, Mahendra Patel, Hossein Hooshyar,  
Aboutaleb Haddadi

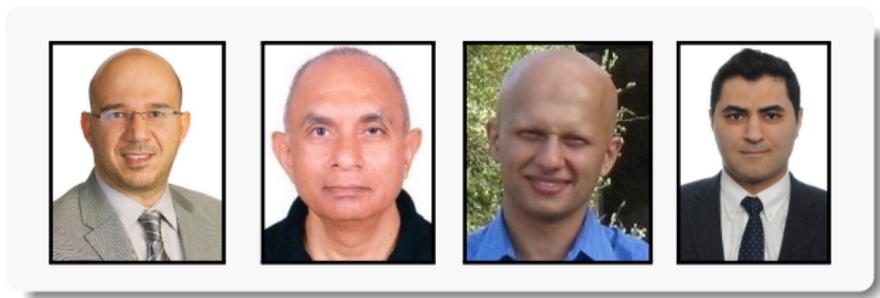

## Questions



The Edward S. Rogers Sr. Department  
of Electrical & Computer Engineering  
UNIVERSITY OF TORONTO



UNIVERSITY OF  
WATERLOO

**EPRI**  
ELECTRIC POWER  
RESEARCH INSTITUTE

<https://www.control.utoronto.ca/~jwsimpson/>  
[jwsimpson@ece.utoronto.ca](mailto:jwsimpson@ece.utoronto.ca)

# Comparison with Traditional Frequency Control

## Traditional frequency control:

- ① **very fast** inertial response of machines limits ROCOF
- ② primary layer (droop) provides **“fast”** & **global** stabilizing response
- ③ secondary layer (AGC) provides **slow** & **“localized”** response

## Traditional frequency control + next-gen IBR controller:





- ① **very fast** inertial response of machines limits ROCOF
- ② Stage 1 (local IBR redispatch) provides **fast & localized** response

Ideally, **minimal activation** of SG turbine-govs





- ③ Stage 2 (global IBR redispatch) provides **fast & semi-local** response
- ④ AGC cleans up any remaining mismatch on minutes time-scale

## Frequency Scenario: Robustness Test

- Introduce large (50%–100%) errors in parameters ( $H$ ,  $T$ ,  $R$ , ...) used for LCA disturbance estimator designs

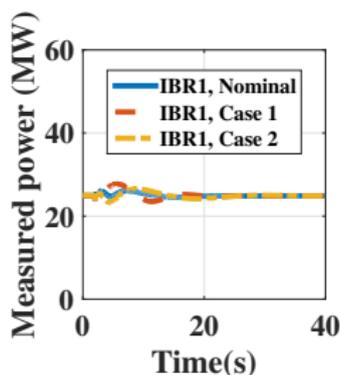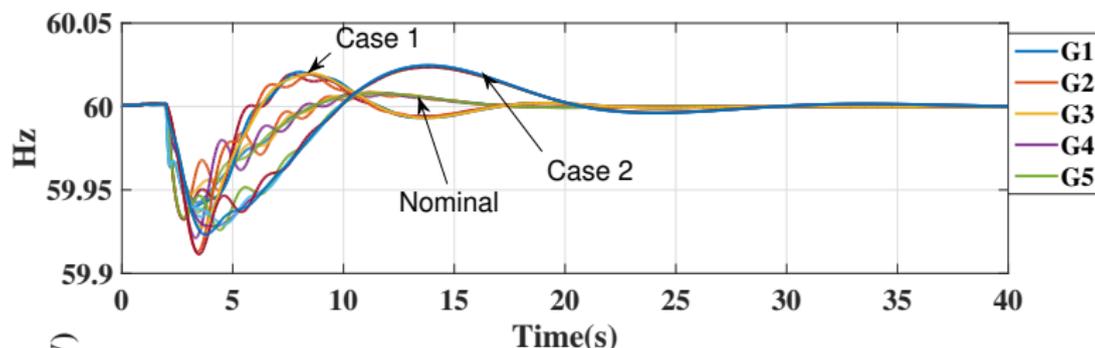

# Scenario: 150MW/80MVAR Disturbance (VC Priority)

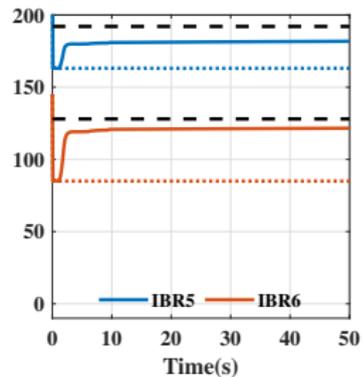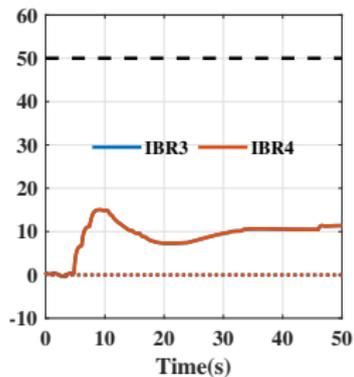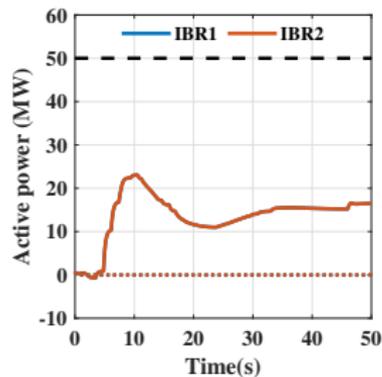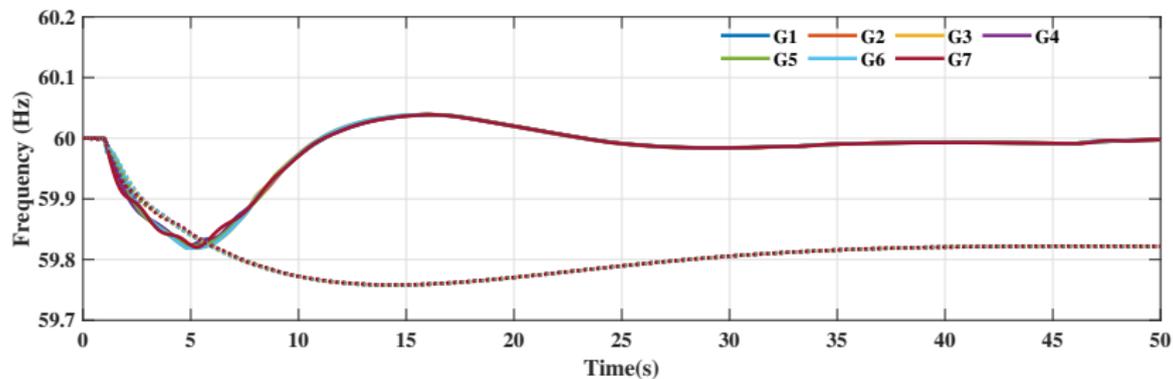

# Scenario: 150MW/80MVAR Disturbance (VC Priority)

